BENCHMARK NO. 1 ELEV. = 809.39'
NORTHWEST FLANGE BOLT IN THE HYDRANT LOCATED 40'± SOUTH OF THE CL OF WESTVIEW DR. AND 22'± WEST OF THE CL OF GOLF MEADOWS DR. (N.A.V.D. 88)

BENCHMARK NO. 2 ELEV. = 801.13'
RAILROAD SPIKE IN THE WEST SIDE OF THE POWER POLE LOCATED 76'± WEST OF THE CL OF PATTERSON AVE. AND 1,380'± SOUTH OF THE CL OF 76TH ST. (N.A.V.D. 88)

BENCHMARK NO. 3 ELEV. = 808.78'
RAILROAD SPIKE IN THE NORTH SIDE OF THE POWER POLE LOCATED 76'± WEST OF THE CL OF PATTERSON AVE. AND 2,200'± SOUTH OF THE CL OF 76TH ST. (N.A.V.D. 88)

GENERAL NOTES:
1. P.P.N. 41-23-18-101-005 (PART OF)
   ADDRESS: 4950 76TH STREET (PART OF)
   APPLICANT:
   HOWIE HEHRER
   JTB HOMES
   1777 RW BERENDS SW
   WYOMING, MICHIGAN 49519
2. CURRENT ZONING: A, AGRICULTURAL
   MINIMUM LOT AREA: 2 ACRES
   MINIMUM LOT WIDTH: 200 FEET
   OPEN SPACE: 0%
   SETBACKS:
   FRONT YARD 50 FEET
   SIDE YARD 25 FEET
   REAR YARD 50 FEET
   MAXIMUM BUILDING HT. 35 FEET
3. PROPOSED P.U.D. ZONING:
   MINIMUM LOT AREA: 10,000 S.F.
   MINIMUM LOT WIDTH: 75 FEET (AT FRONT SETBACK)
   OPEN SPACE: 8.08 ACRES (27%)
   SETBACKS:
   FRONT YARD 30 FEET
   SIDE YARD 10 FEET MIN
   REAR YARD 25 FEET
   MAXIMUM BUILDING HT. 35 FEET
4. CONTOUR INTERVALS = 1 FOOT.
5. ALL LOTS ARE INTENDED FOR SINGLE FAMILY USE ONLY.
6. ALL STREETS WILL BE PRIVATE AND WILL BE CONSTRUCTED PER CALEDONIA TOWNSHIP STANDARDS AND SPECIFICATIONS.
7. THE SITE WILL BE SERVED BY PUBLIC UTILITIES – 8 INCH SANITARY SEWER, 12 INCH OR LARGER STORM SEWER, 8 INCH WATER MAIN, BURIED ELECTRICAL, GAS, TELEPHONE, AND CABLE TV. IT IS ALSO INTENDED TO INSTALL STREET LIGHTS WITH LOCATIONS PER PLAN.
8. STORM WATER MANAGEMENT SYSTEM SHALL CONFORM TO THE CALEDONIA TOWNSHIP STANDARDS AND SPECIFICATIONS.
9. THIS SITE SHALL CONFORM TO THE KENT COUNTY SOIL EROSION CONTROL ORDINANCE.
10. SIDEWALKS WILL BE PROVIDED AS SHOWN AND INSTALLED AT TIME OF HOME CONSTRUCTION UNLESS OTHERWISE NOTED ON PLANS.
11. ALL BIT. PATHWAYS SHALL BE CONSTRUCTED DURING PHASE 1 AND AT THE TIME OF ROAD CONSTRUCTION.
12. MAIL DELIVERY WILL UTILIZE CLUSTER BOX UNITS.
13. STREET TREES WILL BE INSTALLED AT 1 PER UNIT AND 2 PER CORNER UNIT.
14. ALL CONSTRUCTION TRAFFIC SHALL BE FROM PATTERSON AVENUE.
15. SIDEWALKS – ALL SIDEWALKS SHALL BE BUILT AT THE TIME OF HOME CONSTRUCTION. ANY SIDEWALK THAT FRONTS OPEN SPACE OR COMMON AREA SHALL BE CONSTRUCTED AT THE TIME THE ADJACENT ROADWAY IS BUILT. ALL SIDEWALKS SHALL BE INSTALLED WITHIN TWO YEARS OF THE ISSUANCE OF THE FIRST BUILDING PERMIT. GAPS IN SIDEWALKS AT TIME SHALL BE INSTALLED BY DEVELOPER.
16. ALL ONSITE AND OFFSITE PATHWAYS SHALL BE CONSTRUCTED AS PART OF THE DEVELOPMENT OF PHASE 1. PATHS ON CALEDONIA SCHOOLS PROPERTY SHALL BE INSTALLED PRIOR TO THE START OF THE 2025 SCHOOL FALL SEMESTER
17. PROVISIONS FOR AN OPEN SPACE EASEMENT PER THE REQUIREMENTS OF SECTION 15.5(g) WILL BE INCLUDED IN THE MASTER DEED.
18. PHASE 1 AND 2 SHALL BE CONSTRUCTED AT THE SAME TIME.

SUMMARY OF LAND DEVELOPMENT:

	TOTAL
ACREAGE (ACRES)	30.07 (EXC. R/W)
OPEN SPACE (ACRES)	12.72
NUMBER OF UNITS	44
SMALLEST UNIT AREA	10,000 S.F. (UNIT 5)
LARGEST UNIT AREA	38,923 S.F. (UNIT 21)
AVERAGE UNIT SIZE	12,908 S.F.
DEVELOPMENT DENSITY	1.46 UNITS PER ACRE
TOTAL ROW AREA	4.30 ACRES
TOTAL ROADWAY LENGTH	2,644 FEET

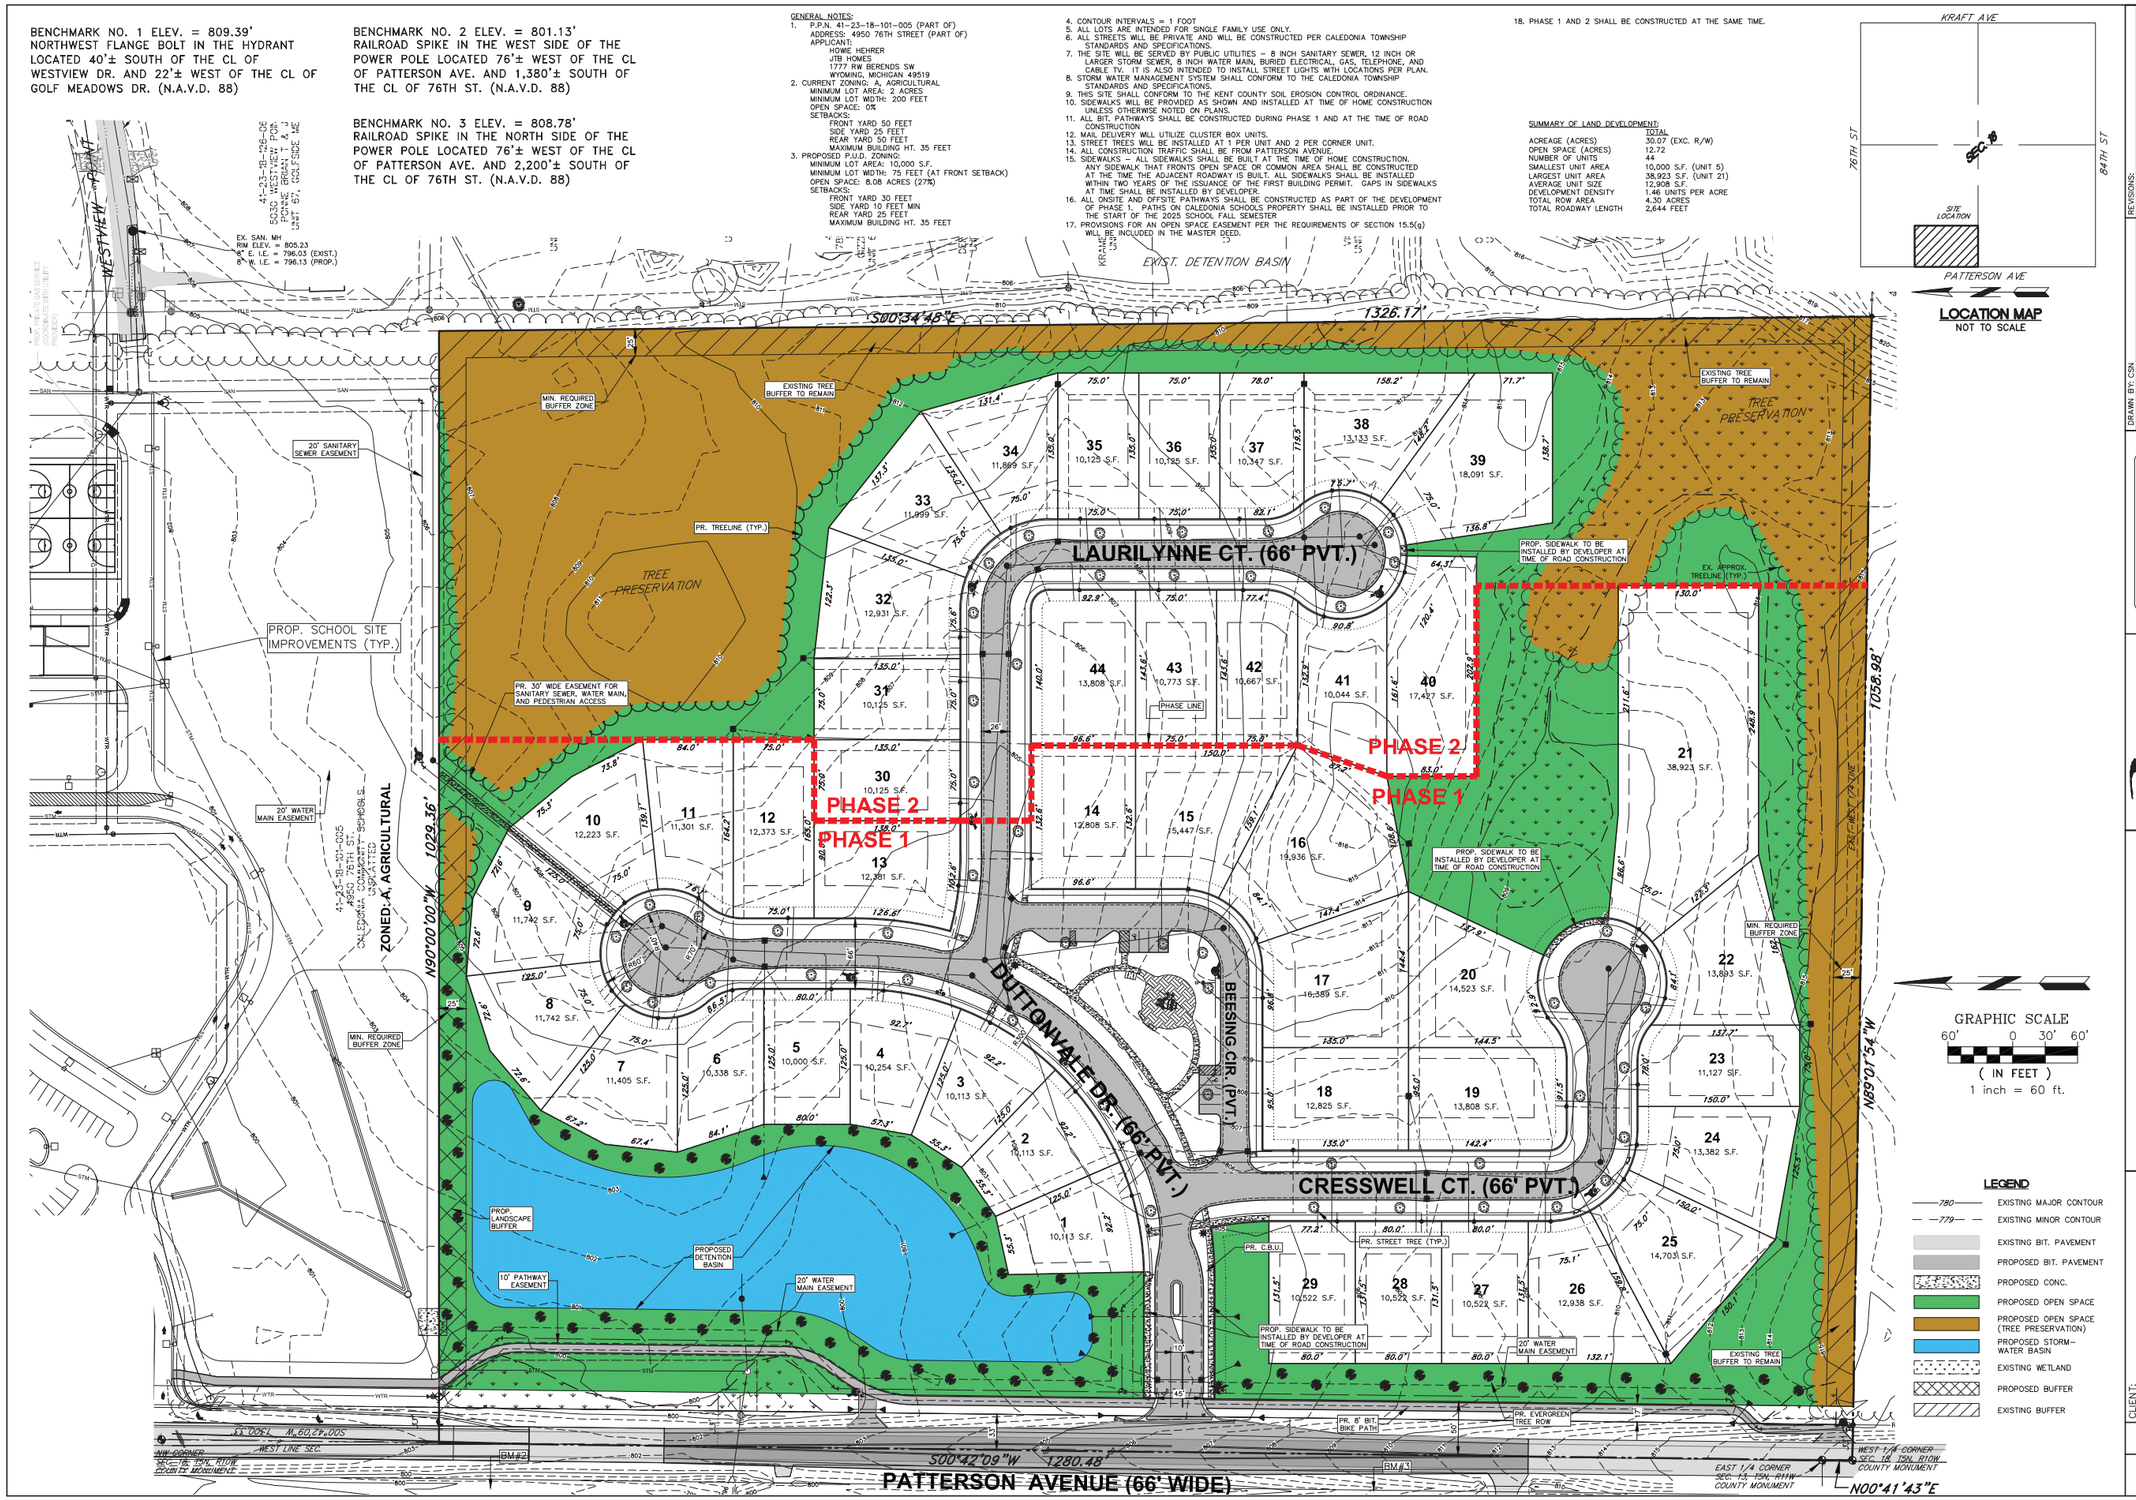

LOCATION MAP
NOT TO SCALE

GRAPHIC SCALE
60' 0 30' 60'
(IN FEET)
1 inch = 60 ft.

LEGEND
- EXISTING MAJOR CONTOUR
- EXISTING MINOR CONTOUR
- EXISTING BIT. PAVEMENT
- PROPOSED BIT. PAVEMENT
- PROPOSED CONC.
- PROPOSED OPEN SPACE
- PROPOSED OPEN SPACE (TREE PRESERVATION)
- PROPOSED STORM-WATER BASIN
- EXISTING WETLAND
- PROPOSED BUFFER
- EXISTING BUFFER

DRAWN BY: CSN
REVIEWED BY: DSH
DATE: November 19, 2024
REVISIONS:
December 5, 2024 – Rev. W.M. per Twp.
January 17, 2025 – Rev. Per Twp.

SERVING THE NEEDS OF OUR CLIENTS SINCE 1987

Rondon & Associates
SURVEYING AND ENGINEERING
5055 PLAINFIELD AVE. NE
GRAND RAPIDS, MI 49525
TELE (616) 361-7220
FAX (616) 361-1822

P.U.D. PLAN
DUTTON PRESERVE
PART OF SECTION 18, T5N, R10W
CALEDONIA TOWNSHIP, KENT COUNTY, MICHIGAN

CLIENT:
HOWIE HEHRER
JTB HOMES
1777 RW BERENDS SW
WYOMING, MI 49515

PROJECT NO.
221303

C-102

DUTTON PRESERVE

12