Form 931 condensed	CATV		Phone		Non-CE Gas		Non-CE Elec.		Other	
Wire installed is the Trench Footage of the largest Non-CE wire placed.	Size	Ft.	Size	Ft.	Size	Ft.	Size	Ft.	Size	Ft.
Trench (Feet-Joint with CE)										
Trench (Feet-Not Joint with CE)										
Wire Install(Feet-non CE wire placed)										
Pull thru conduit (feet-of conduit)										
Boring(diameter of bore•feet bored)										
Pedestal(s) installed										
Misc Comments:										

Joint Work Contacts	Company Name	Contact Name	Phone Number	Reference # (NJUNS, UT # verbal, Etc.	with ? Y/N
Phone					
CATV	CHARTER	JUSTIN CHAMBERS	616-414-7488	VERBAL	Y
Foreign Gas					
Other					

CHARTER TO GO JOINT

ALL VOLTAGE CALCS DONE WITH 3/C 3/0AL SERVICES

DETAIL A

TYPICAL PADMOUNT TRANSFORMER INSTALLATION



UNDERGROUND LEGEND

1. Single-phase primary
2. Open wye primary
3. Three-phase primary
4. Single-phase secondary
5. Combination light and power secondary
6. Three-phase secondary
7. Single-phase service
8. Combination lighting and power service
9. Three-phase power service
10. Streetlighting conductor (2/C-#10 CU)
11. Streetlighting conductor (2/C-#8 AL)
12. Covered neutral conductor for ducts
13. Streetlighting conductor (3/C-1/0 AL)

CONDUIT

P2 2"Plastic P3 3"Plastic P4 4"Plastic P6 6"Plastic

S2 2"Steel S3 3"Steel S4 4"Steel S6 6"Steel

CABLE MATERIAL AND SIZE

A. No 2 AL cable,175 mils,15KV, or secondary.
B. No 1/0 AL cable,175 mils,15KV, or secondary.
C. No 3/0 AL cable,175 mils,15KV, or secondary.
D. 250 kcmil AL cable,175 mils, 15KV, or secondary.
E. 500 kcmil copper cable,175 mils, 15KV, or secondary.
F. 750 kcmil AL cable,175 mils, 15KV, or secondary.
FF. 1000 kcmil AL cable (175 mils tree-retardant XLP, Jacketed)
G. No 1/0 stranded AL cable, 280 mils, 28KV.
H. No 3/0 stranded AL cable, 280 mils, 28KV.
I. 750 kcmil AL cable, 280 mils, 28KV.
J. Cable joint.
K. 350 kcmil AL cable, 280 mils, 25KV.
M. Marker to locate cable
N. Refer to Note on Drawing, MI for Note 1, etc.
R. No 1/0 AL, solid, 280 mils, 28KV.
T. No 1/0 AL stranded, 280 mils, 28KV, jacketed
TT. No 1/0 AL stranded cable, 280 mils tree-retardant MS,25KV,Jacketed.
V. 350 kcmil AL stranded, 280 mils, 25KV, jacketed.
VV. 350 kcmil AL cable, 280 mils tree-retardant MS, 25KV, Jacketed.
W. 750 kcmil AL stranded, 280 mils, 28KV, jacketed.
WT. 750 kcmil AL cable, 280 mils tree-retardant MS, 28KV, Jacketed.

PROP. ELEC. CONDUCTORS ONLY
PROP. ELEC. AND GAS LINES ONLY
PROP. GAS LINE ONLY
PROP. ELEC., GAS AND TELECOMMUNICATIONS
EXIST. ELEC. CONDUCTORS ONLY
EXIST. GAS LINE ONLY
FUTURE ELECTRIC TRENCH

EX: 5R = No. 1/0 solid AL cable for three-phase primary

3C 4D = No. 1/0 AL cable for 3-phase primary and 350 AL cable for 1-phase secondary

CONDUCTOR CHANGE

FRONT LOT FOOTAGE	
LOT NO.	FOOTAGE
26	171
27	143
28	112
29	137
30	145
31	111
32	110
33	110
34	111
35	65
36	89
37	320
38	238
39	200
40	202
41	124
42	70
43	66
8877	256
TOTAL = 2780'	

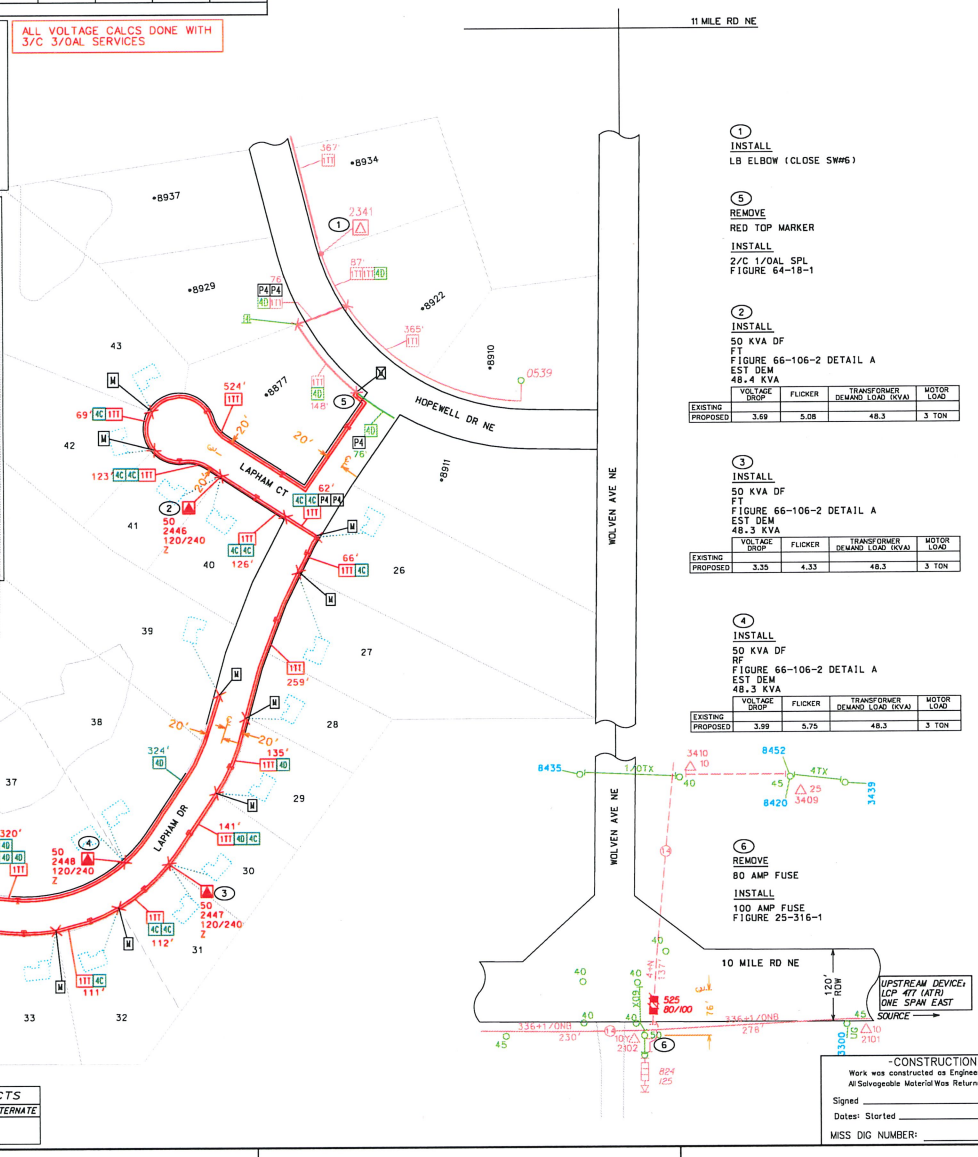

1 INSTALL
LB ELBOW (CLOSE SW#6)

5 REMOVE
RED TOP MARKER

INSTALL
2/C 1/0AL SPL
FIGURE 64-18-1

2 INSTALL
50 KVA DF
FT
FIGURE 66-106-2 DETAIL A
EST DEM
48.4 KVA

	VOLTAGE DROP	FLICKER	TRANSFORMER DEMAND LOAD (KVA)	MOTOR LOAD
EXISTING				
PROPOSED	3.69	5.08	48.3	3 TON

3 INSTALL
50 KVA DF
FT
FIGURE 66-106-2 DETAIL A
EST DEM
48.3 KVA

	VOLTAGE DROP	FLICKER	TRANSFORMER DEMAND LOAD (KVA)	MOTOR LOAD
EXISTING				
PROPOSED	3.35	4.33	48.3	3 TON

4 INSTALL
50 KVA DF
RF
FIGURE 66-106-2 DETAIL A
EST DEM
48.3 KVA

	VOLTAGE DROP	FLICKER	TRANSFORMER DEMAND LOAD (KVA)	MOTOR LOAD
EXISTING				
PROPOSED	3.99	5.75	48.3	3 TON

6 REMOVE
80 AMP FUSE

INSTALL
100 AMP FUSE
FIGURE 25-316-1

ONE LINE DIAGRAM
NO SCALE

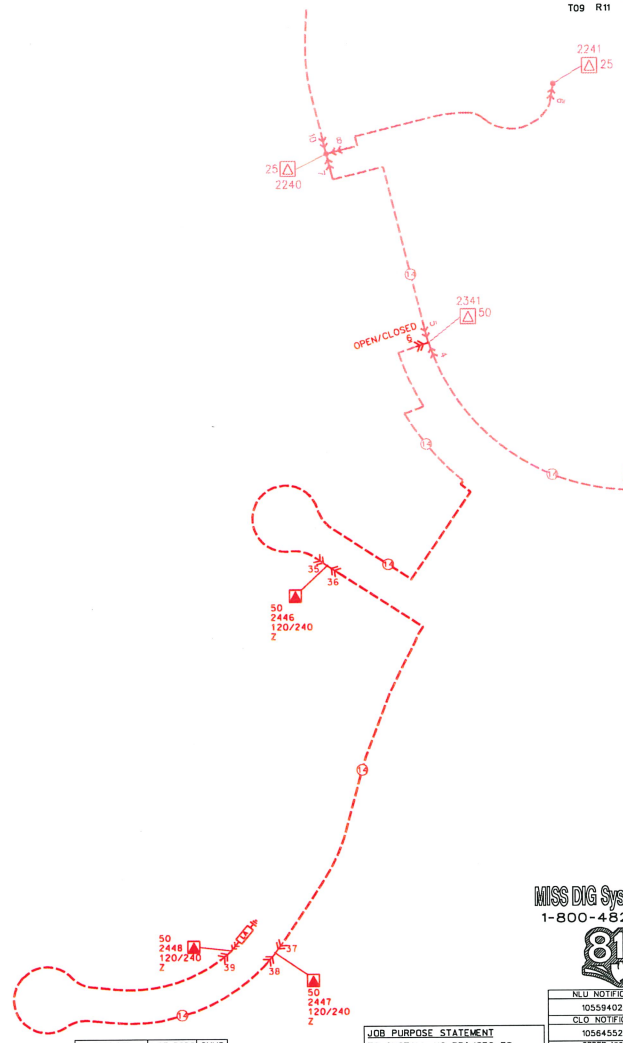

KENT CO
ALGOMA TWP
T09 R11 SEC.35

MISS DIG System, Inc.
1-800-482-7171
811

NLU NOTIFICATION
1055940241
CLO NOTIFICATION
1056455293
ORDER NUMBER

JOB PURPOSE STATEMENT
TO INSTALL UG PRI/SEC TO NEW SUBDIVISION

CONSUMERS ENERGY CONTACTS			
DEPARTMENT	NAME	NUMBER	ALTERNATE
DESIGNER	RYAN WEST	248-786-7167	
COORDINATOR	JOHN O'NEILL	616-606-6117	

-CONSTRUCTION CERTIFICATION-
Work was constructed as Engineered or Changed as indicated.
All Salvageable Material Was Returned to Stores.
Signed _____ in Direct Charge of Work
Dates: Started _____ Completed _____
MISS DIG NUMBER: _____ DATE: _____

TLM NO.	# OF RODS	OHMS
0911352446		
STAKED ☐ YES ☒ NO		
TREES ☐ YES ☒ NO		
TLM NUMBER	# OF RODS	OHMS
0911352447		
0911352448		

Consumers Energy
A CMS Energy Company ELECTRIC

DESIGNED BY RWEST	DATE 02/15/21
APPROVED BY	DATE
SHEET 01 OF 01	SCALE NONE

43 North Ph 2 July 2021
For: WOLVEN INVESTMENTS LLC
8895 HOPEWELL DR

SUBSTATION ROGUE RIVER	WO NO. 1042	
CIRCUIT CANNON FARMS	CKT NO. 01	LCP NO. 0539

CM NO. 100006205819

ORDER TYPE	MAINTENANCE ACTIVITY TYPE	DESIGN NUMBER
ECNC	NLU	11225604
ECNC	CLO	11227350

DESIGN FILE NAME: 11225604.001
T R S 09 11 35

ELECTRIC CAD TITLE BLOCK (22x34) 10-30-2008
SHEET D
3/1/2021 6:31:40 AM C:\ut\bsckup\wrad\ustn\dgn\11225604.001